



LANDOLL MODEL 850/855 FINISHOLL



3 YEAR
WARRANTY



Preparing a perfect seedbed is the key to improving your field's chances of increasing yield and uniform emergence. Proper seedbed preparation helps warm up soil for earlier planting and maintain uniform working depth, and allow for

**Landoll... Why
Always a**



Rockflex Straight Coulter Gang or Rockflex Disc Gangs


Rockflex disc gangs are set at 8° angles. Combined with special 20" (508mm) shallow blades on 7-1/2" (190.5mm) spacings, this allows for assertive cutting action and elimination of ridging.




The Finisholl provides excellent shank spacing. No shank is closer than 28" (711mm) to another shank. The shanks are not grouped together (pocketing), which can cause plugging. The Finisholl is designed to handle the high residue of today's farming.



Landoll offers a Choice

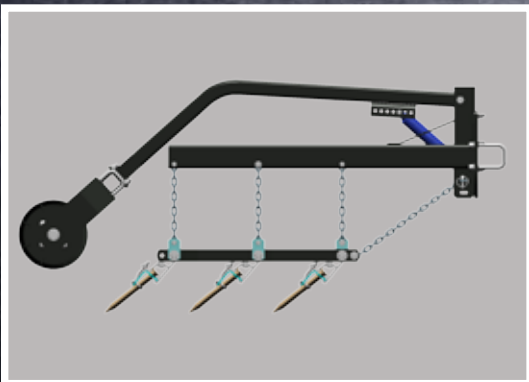

3 Bar Chain with Single Rolling Basket
(Also available 3 Bar Coil with Single Rolling Basket)

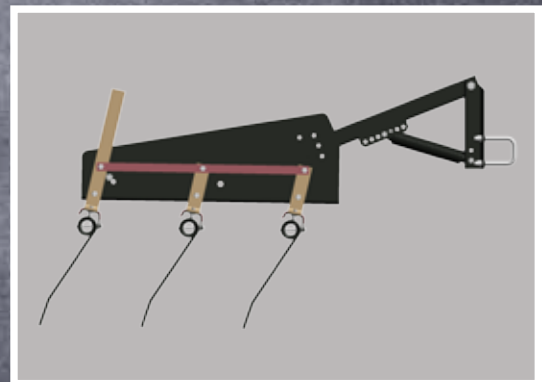


**3 Bar Coil Tine Harrow with
3/8" x 18" (9.53mm x 457.2mm) Coil
Tines with Simple Angle Adjustability**

fields. A firm, level seedbed allows for better seed-to-soil contact, which results in faster germination and a longer growing season. For maximum efficiency and versatility, the Landoll Finisher is made to pull easy, for smooth and even residue flow in the toughest field conditions.

Where Quality is Bargain!



Range of Finishing Attachments

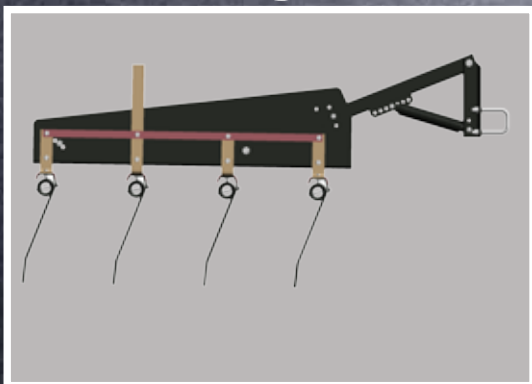

**4 Bar Coil Tine Harrow with
3/8" x 18" (9.53mm x 457.2mm) Coil Tines
with Simple Angle Adjustability**




Narrow Transport Width

The Model 850 has one of the narrowest transport widths in the industry. Another factor in Landoll's commitment to user safety.



Standard Outrigger Gauge Wheels

For rolling or hilly terrain and other difficult conditions, standard wing gauge wheels eliminate ridging and gouging. Wide 20.5"x8-10 tires give more than adequate flotation.

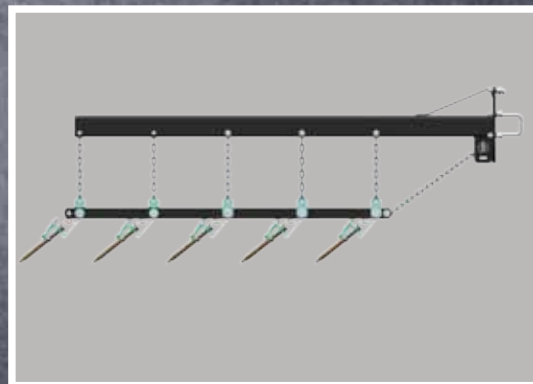

5 Bar Chain Spike Tooth Harrow



850/855 FINISHOLL SPECIFICATIONS

STANDARD SPECIFICATIONS

Frame:

- 6" x 2" (152mm x 51mm) Exterior Frame
- 4" x 3" (102mm x 76mm) Interior Frame

Shanks:

- Choice of C-Flex or Spring Clamp Shank Assemblies with Edge Bent Shank
- 10" (254mm) Sweeps
- True 8" (203mm) Shank Spacing
- 25.5" (647.7mm) Underframe Clearance

Disc Gangs:

- Choice of 20" (508mm) Shallow Concavity Disc Blades with 8° Cut Angle or 20" (508mm) Straight Coulter Gangs with Rock-Flex Protection
- 7-1/2" (190.5mm) Disc or Coulter Spacing

Hitch:

- T-Type Hitch with Level Lift Linkage

Axles:

Mainframes:

- Single Gauge Wheels – Rigid Models
- Walking Tandems – Folding Models

Wings:

- Single Gauge Wheels – 850-17 Through 850-22
- Walking Tandems – 850-25 Through 850-35
- 850-11 Through 850-27 – 15" x 8" 6-Bolt Hub with Tires
- 850-30 Through 850-35 – 15" x 8" 8-Bolt Hub with Tires
- Screw Adjust Outrigger Gauge Wheels

- Hydraulic Disc or Coulter Gang Adjustment
- Walking Tandems on 850-11 and 850-14

OPTIONAL EQUIPMENT

- Rigid Models
- Rear Tank Hitch Attachment
- 3-Bar Coil Tine Harrow

- 4-Bar Coil Tine Harrow
- 5-Bar Spike Tooth Harrow
- 3-Bar Coil Tine with Single Rolling Basket
- 3-Bar Spike Tooth with Single Rolling Basket

MODEL SPECIFICATIONS

Model Number	Width Of Cut (M)	Transport Width (M)	Transport Height (M)	NO. of Shanks	NO. of Discs	Approx. Weight**LBS (kg)
*850/55-11	11'4" (3.45)	13'0" (3.96)	N/A	17	21	4,958-5,771 (2,249-2,618)
*850/55-14	14'0" (4.27)	15'5" (4.70)	N/A	21	22	5,456-6,321 (2,475-2,867)
850/55-17	16'8" (5.08)	12'0" (3.66)	9'0" (2.74)	25	28	7,991-8,926 (3,625-4,049)
850/55-19	19'4" (5.89)	12'0" (3.66)	10'3" (3.12)	29	32	9,055-10,087 (4,107-4,576)
850/55-22	22'0" (6.71)	12'0" (3.66)	11'6" (3.51)	33	36	9,813-10,970 (4,451-4,976)
850/55-25	24'8" (7.52)	12'0" (3.66)	12'9" (3.89)	37	40	10,226-11,434 (4,638-5186)
850/55-27	27'4" (8.33)	12'0" (3.66)	13'11" (4.24)	41	44	10,811-12,109 (4,903-5,493)
850/55-30	30'0" (9.14)	14'8" (4.47)	13'11" (4.24)	45	48	14,250-16,138 (6,463-7,320)
850/55-33	32'8" (9.96)	14'8" (4.47)	16'4" (4.98)	49	52	15,567-17,730 (7,061-8,043)
Narrow 850/55-33	32'8" (9.96)	17'4" (5.28)	13'11" (4.24)	49	52	15,617-17,524 (7,083-7,949)
Wide 850/55-35	35'4" (10.77)	17'4" (5.28)	16'4" (4.98)	53	56	16,715-18,814 (7,581-8,534)

*Rigid Models- All other models are Wing

**Weights vary according to shank and finishing attachment selection.



Continuous product improvement is a Landoll goal. Therefore, we reserve the right to make any changes in illustration, specification, equipment, and prices without prior notice and without changes on previous models.

1900 North Street • Marysville, KS 66508 • (785) 738-6613 • www.landoll.com

