



LOW BED SEMITRAILER

NSN: 2330-01-094-0007



GSA CONTRACT #GS-30F-0016L

DLA CONTRACT #SPE8EC-13-D-0009

TECHNICAL SPECIFICATIONS MODEL: 135-CSY ROLLERIZED

Main Frame:	Fabricated 100,000 PSI and 80,000 PSI Main Beams 8" Structural Channel Siderails Capacity - 40,000 LB / 26,000 LB in 10'	Suspension:	Multi-Leaf Springs 50,000 LB Capacity
Kingpin:	2" Kingpin Per SAE J700 21" Kingpin Setting (from Front of Trailer)	Brakes:	Automatic Slack Adjusters 16.5" X 7" Full Air Spring Brakes ABS Meritor Wabco 4S/2M Service and Emergency Brakes
Crossmembers:	6" Jr. I-Beam on 18" Centers	Tires/Wheels:	255/70R 22.5 Goodyear LRH
Deck and features:	Width - 96" Lower Deck Length - 42' (from Back of Gooseneck to Back of Trailer, Without Ramp) Overall Length - 53' (Without Ramp) Upper Deck Length - 11' 2 1/4" Apitong Wood Decking Steel Walkways Bulkhead Assy 48" x 96" Rollerized Deck	Spare Tires and Storage:	Spare Tire and Wheel with Carrier Underneath Trailer (Curbside)
		Electrical	12V Electrical System and Lighting 7 Way Receptacle per SAE J560
Tiedowns/Stake:	"D" Rings (12) - (6) Per Side Evenly Spaced	Finish/Color:	Steel Grit Shot Blast to Bright Metal TGIC Polyester Powder Coat with Zinc Rich Powder Coat Primer Standard Acrylic Urethane Wet Paint with Two Part Epoxy Primer Optional
Toolbox:	Under deck Mount	GVWR:	57,300 LBS
Landing Gear:	Two Speed Retractable Landing Gear Lift Capacity- 50,000 LB Static Capacity - 160,000 LB	Ramps (Optional):	4' Length with Manually Operated Hydraulic Pump
Axles:	(2) 25,000 LB Tandem Dual Tire, Oil Bath Bearings	Air Hookup:	Color Coded Glad Hands
		Custom Options Available: Call OEM/Military Sales Group for details: 785-562-4729	

LANDOLL CORPORATION - OEM/Military Sales
785-562-4729 • www.landoll.com

GSA





LOW BED SEMITRAILER



GSA CONTRACT # GS-30F-0016L

DLA CONTRACT # SPE8EC-13-D-0009

OPTIONAL FEATURES



Under Deck Mount Toolbox




Spare Tire Carrier



Rollers



Ramp

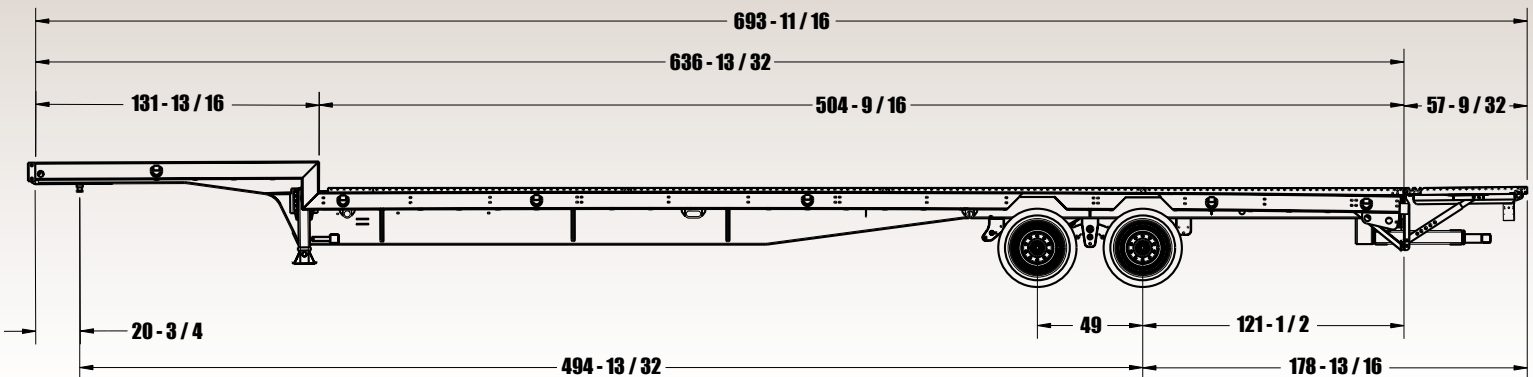

LANDOLL CORPORATION - OEM/Military Sales

1900 North Street • Marysville KS 66508 • Phone: 785-562-4729 • Fax: 785-562-4852

www.landoll.com



Intertek